

Fig.

108

FIG. 2

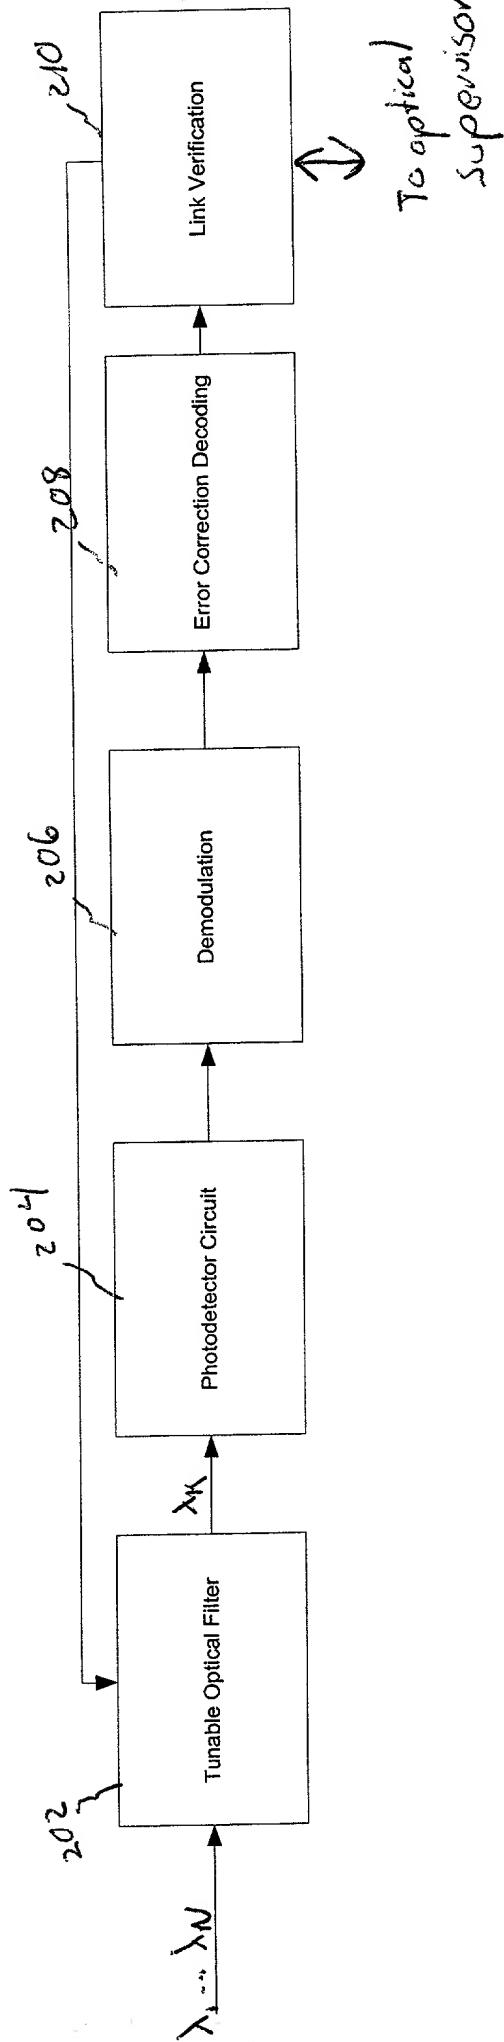


Fig. 2

704259-5659550

302

Receive fault indication
from DWDM receiver on
selected wavelength.

304

Check selected wavelength
availability at successive
monitors.

306

Indicate fault as being
before first monitor that
does not receive selected
wavelength or experiences
BER degradation.

Fig. 3

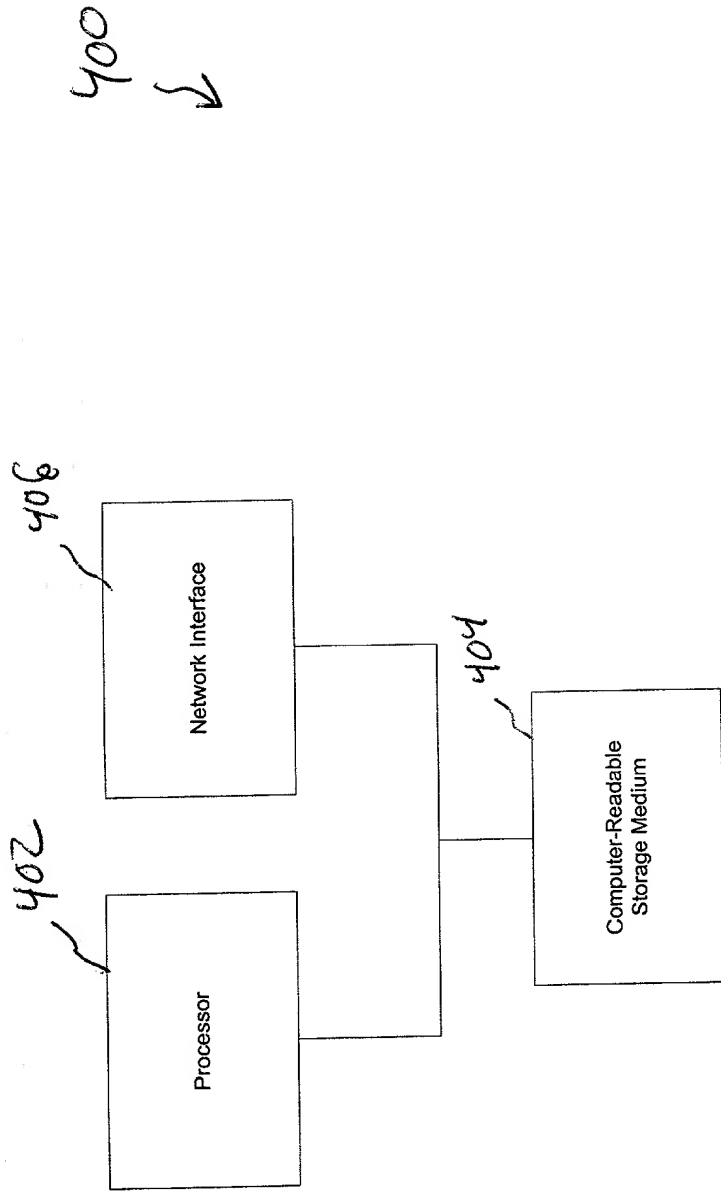


Fig 4